



## MICRO DOMES

Part Number D = Dimple	Size mm	Height mm	Travel mm	Force Gms	Rebound Gms
<b>Oblong OL-Range</b>					
	<b>A x B</b>	<b>C</b>			
OL429-200	4 x 2.9	0.29	0.22	200.00 +/-25	115.00 +/-20
OL430D-160	4 x 3.05	0.29	0.22	160.00 +/-25	85.00 +/-20
OL538-175	5 x 3.8	0.30	0.23	175.00 +/-25	90.00 +/-20
OL538D-175	5 x 3.8	0.30	0.22	175.00 +/-25	90.00 +/-20
OL538-200	5 x 3.8	0.30	0.23	200.00 +/-25	120.00 +/-20
OL538D-200	5 x 3.8	0.30	0.22	200.00 +/-25	120.00 +/-20

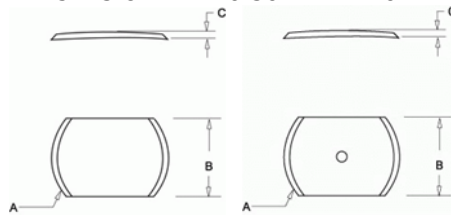

**OL-Range**


<b>4 Leg S-Range</b>					
	<b>A</b>	<b>C</b>			
S5.4-125	5.00	0.30	0.22	125.00 +/-25	80.00 +/-20
S5.4D-125	5.00	0.30	0.21	125.00 +/-25	80.00 +/-20
S5.4-140	5.00	0.29	0.23	140.00 +/-25	75.00 +/-20
S5.4-150	5.00	0.29	0.23	150.00 +/-25	75.00 +/-20
S5.4D-170	5.00	0.29	0.24	170.00 +/-25	85.00 +/-20
S5.4-180	5.00	0.28	0.24	180.00 +/-25	85.00 +/-20
S5.4-200	5.00	0.28	0.24	200.00 +/-25	100.00 +/-20
S5.4-225	5.00	0.32	0.25	225.00 +/-25	110.00 +/-20
S5.4D-225	5.00	0.32	0.24	225.00 +/-25	110.00 +/-20
S5.4-250	5.00	0.36	0.30	250.00 +/-25	125.00 +/-20

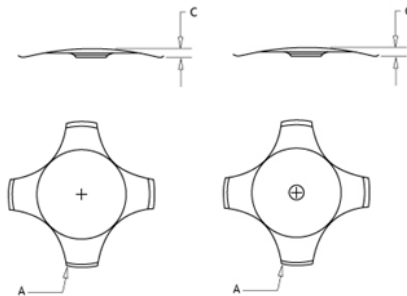

**S-Range**

### Round R-Range

	<b>A</b>	<b>C</b>			
R4-100	4.00	0.19	0.14	100.00 +/-20	50.00 +/-15
R4-150	4.00	0.20	0.15	150.00 +/-20	75.00 +/-20
R4DN-160	4.00	0.21	0.15	160.00 +/-20	80.00 +/-20
R4-160	4.00	0.22	0.15	160.00 +/-20	95.00 +/-20
R4-175	4.00	0.20	0.15	175.00 +/-20	88.00 +/-20
R4DN-175	4.00	0.20	0.14	175.00 +/-20	100.00 +/-20
R4-190	4.00	0.23	0.16	190.00 +/-20	95.00 +/-20
R4DN-190	4.00	0.23	0.15	190.00 +/-20	95.00 +/-20
R4-200	4.00	0.20	0.15	200.00 +/-20	120.00 +/-20
R5-150	5.00	0.24	0.19	150.00 +/-20	90.00 +/-20
R5DN-160	5.00	0.24	0.18	160.00 +/-20	80.00 +/-20
R5-175	5.00	0.28	0.10	175.00 +/-20	175.00 +/-20
R5DN-175	5.00	0.24	0.15	175.00 +/-20	88.00 +/-20
R5DN-190	5.00	0.24	0.17	190.00 +/-20	80.00 +/-20
R5-200	5.00	0.24	0.16	200.00 +/-25	100.00 +/-20
R5DN-200	5.00	0.24	0.15	200.00 +/-25	100.00 +/-20
R5-225	5.00	0.28	0.22	225.00 +/-30	113.00 +/-25

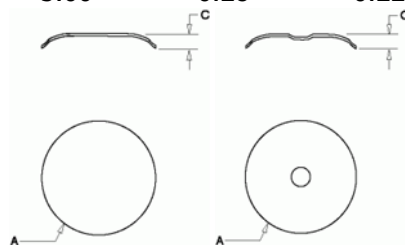

### Triangle T-Range

	<b>A</b>	<b>C</b>			
T5DF-150	5.00	0.29	0.19	150.00 +/-25	75.00 +/-20
T5DF-200	5.00	0.37	0.20	200.00 +/-25	100.00 +/-20
T5DF-350	5.00	0.45	0.38	350.00 +/-30	175.00 +/-25

